

YDF type



YDF type

フリーピストン形




RoHS

RoHS 指令準拠

使用範囲

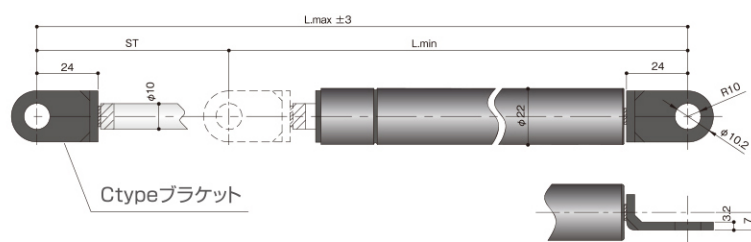


製品コード	形名	シリンダー	最大長		最小長		ストローク		ガス反力		ロッド径	取付穴
			Lmax(mm)	Lmin(mm)	ST(mm)	Ft(N)	Fc(N)					
KG134	YDF150401AA	φ22	500	350	150	401	568	10	8.6			
KG081	YDF050196CC	φ22	246	196	50	196	265	10	10.2			
KG082	YDF050294CC	φ22	246	196	50	294	396	10	10.2			
KG083	YDF050392CC	φ22	246	196	50	392	528	10	10.2			
KG084	YDF080196CC	φ22	330	250	80	196	273	10	10.2			
KG085	YDF080294CC	φ22	330	250	80	294	407	10	10.2			
KG086	YDF080392CC	φ22	330	250	80	392	542	10	10.2			
KG012	YDF100198CC	φ22	386	286	100	198	275	10	10.2			
KG013	YDF100294CC	φ22	386	286	100	294	411	10	10.2			
KG014	YDF100392CC	φ22	386	286	100	392	548	10	10.2			
KG015	YDF130198CC	φ22	470	340	130	198	270	10	10.2			
KG016	YDF130294CC	φ22	470	340	130	294	403	10	10.2			
KG017	YDF130392CC	φ22	470	340	130	392	536	10	10.2			
KG018	YDF150198CC	φ22	526	376	150	198	269	10	10.2			
KG019	YDF150294CC	φ22	526	376	150	294	402	10	10.2			
KG020	YDF150392CC	φ22	526	376	150	392	534	10	10.2			
KG097	YDF180196CC	φ22	610	430	180	196	269	10	10.2			
KG098	YDF180294CC	φ22	610	430	180	294	403	10	10.2			
KG099	YDF180392CC	φ22	610	430	180	392	537	10	10.2			
KG100	YDF200196CC	φ22	666	466	200	196	267	10	10.2			
KG101	YDF200294CC	φ22	666	466	200	294	400	10	10.2			
KG102	YDF200392CC	φ22	666	466	200	392	533	10	10.2			
KG109	YDF250294CC	φ22	750	500	250	294	450	10	10.2			
KG110	YDF250392CC	φ22	750	500	250	392	600	10	10.2			
KG133	YDF090215FF	φ22	330	240	90	215	322	10	9			



Option

お客様のご要望に応じて、取付部を変更する、オーダーメイドのご相談を承っております。

ブラケット

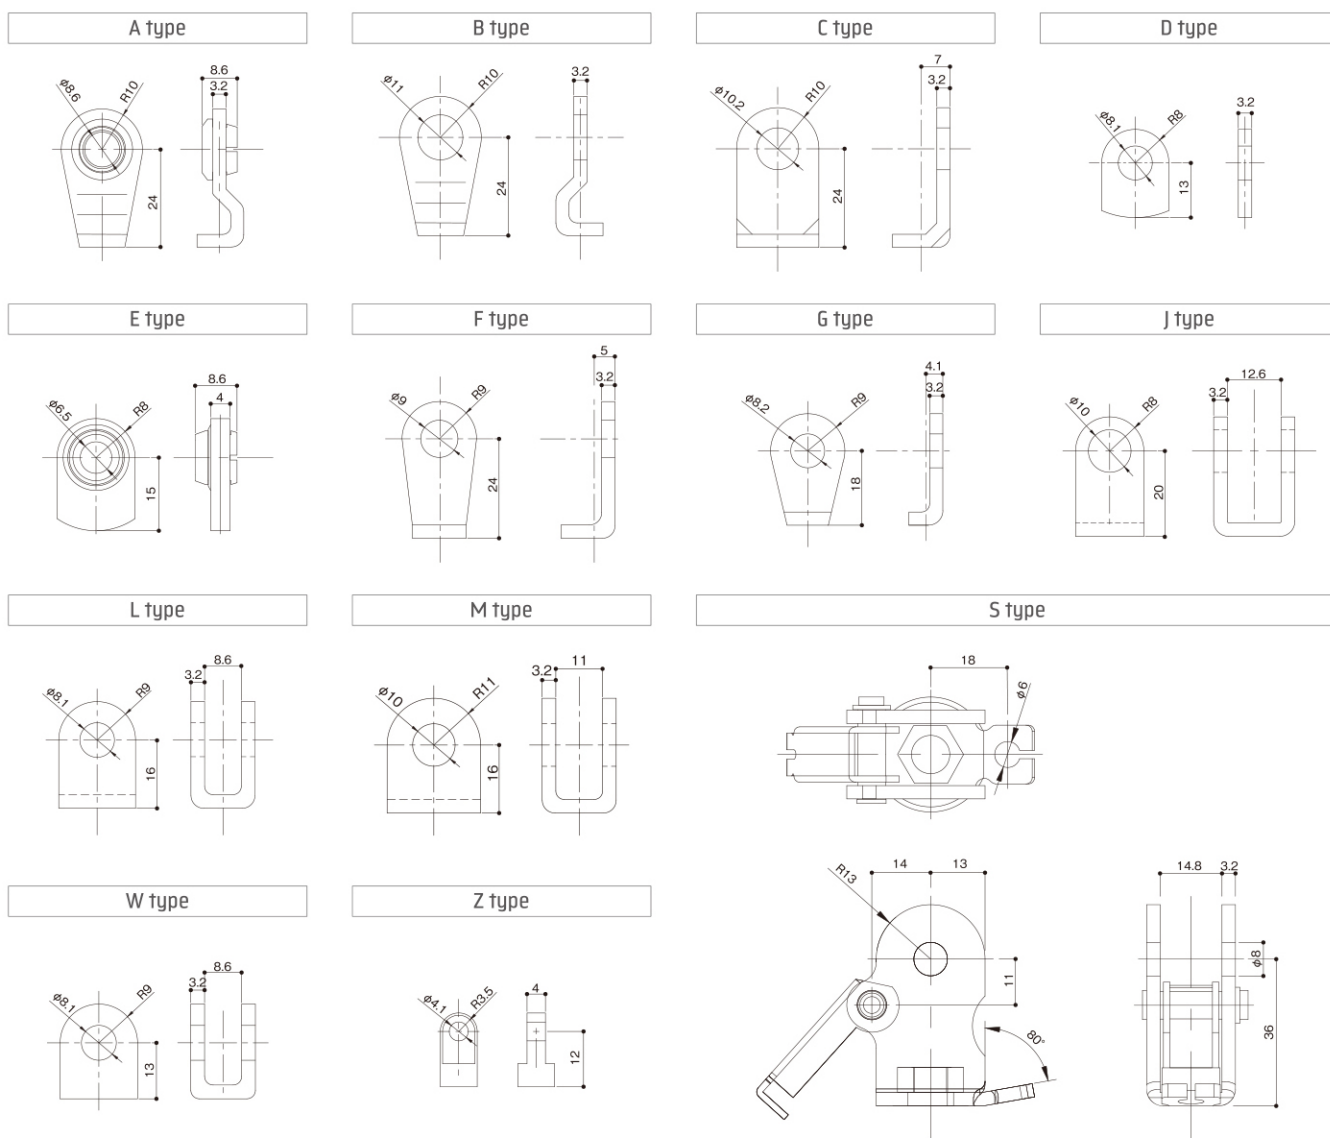

ガススプリング取付用ブラケット

ブラケットA typeおよびE typeのガススプリングの取付けに使用できます。

